



Point of Attachment 12-ft or greater above ground or platform as required to ensure service drop cables and drip loop comply with note A. (open wire services may require greater clearances)

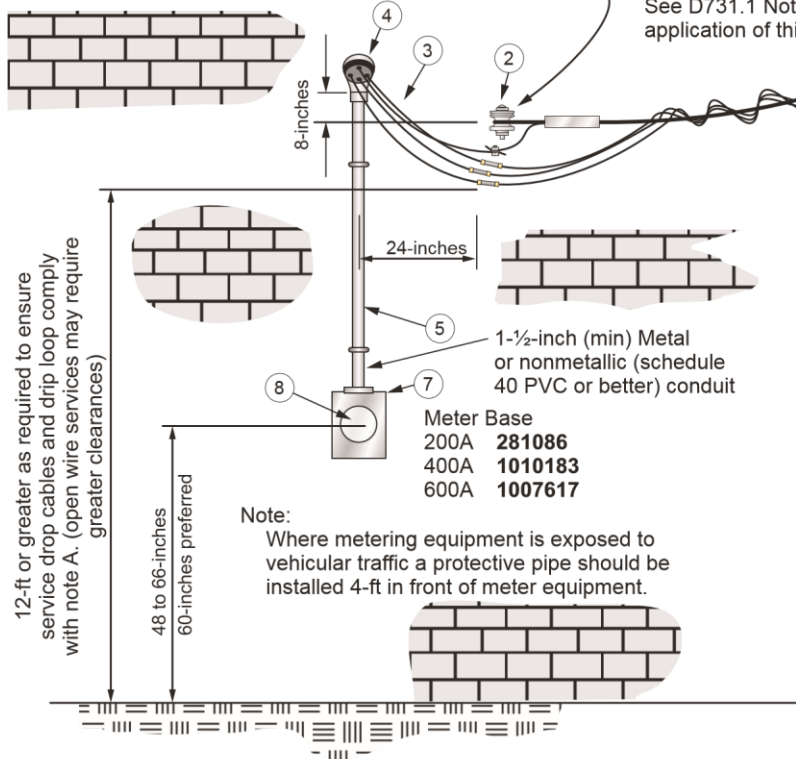

See D731.1 Notes A and B for application of this clearance

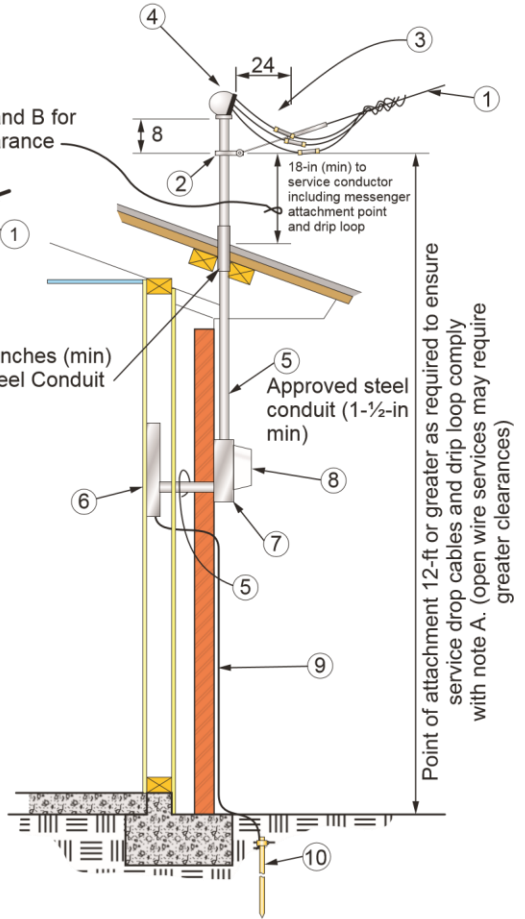

NOTE:

- A. 12-ft over areas restricted to pedestrians or other traffic less than 8-ft in height.
- 16-ft **over areas subject to any traffic greater than 8ft. in height.**
- For swimming pools see D262.4 or D262.6.
- For other situations see D262, D262.1, D262.4 or D262.5.
- For possible reduced clearance requirements for RESIDENTIAL SINGLE STORY buildings see NESC Table 232-1 footnotes 7 and 8.

ITEM NO.	DESCRIPTION	FURNISHED BY		INSTALLED BY	
		O.G.& E.	CONSUMER	O.G.& E.	CONSUMER
1	SERVICE DROP	X		X	
2	SERVICE DROP BRACKET	X			X
3	SERVICE ENTRANCE CONDUCTOR		X		X
4	SERVICE HEAD		X		X
5	SERVICE RACEWAY		X		X
6	SERVICE EQUIPMENT		X		X
7	METER BASE	X			X
8	SELF-CONTAINED METER	X		X	
9	GROUNDING ELECTRODE CONDUCTOR		X		X
10	GROUNDING ELECTRODE		X		X

METER INSTALLATION

FOR SELF-CONTAINED POLY-PHASE METER
208Y/120 OR 240-delta/120-VOLTS 200,400,600-AMPERE


The following is a suggested configuration for meter bases for overhead and underground meters in residential and commercial applications. OG&E Energy Corp., its subsidiaries and affiliates disclaim any liability for the construction or maintenance practices relating to such suggested configuration.

APPROVED **Signatures on File**
SUPERSEDES NOV 2006 ISSUE

D732.1



Leave 24-inches (min) of wire for connection to service. (Furnished and installed by consumer.)

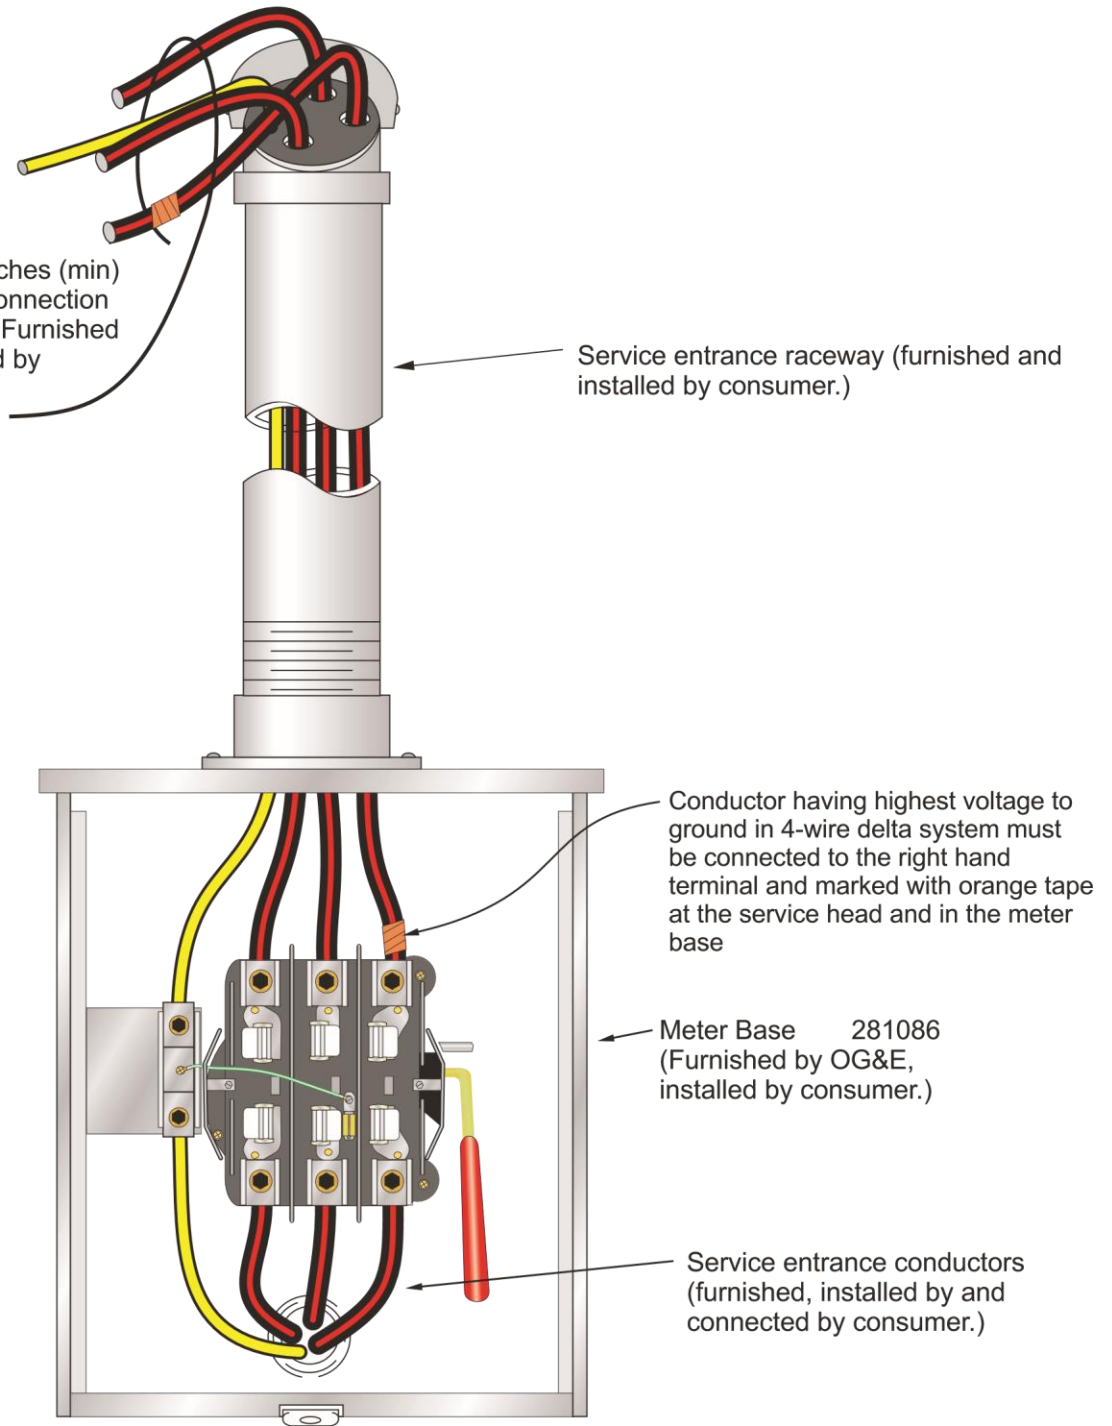

Service entrance raceway (furnished and installed by consumer.)

Conductor having highest voltage to ground in 4-wire delta system must be connected to the right hand terminal and marked with orange tape at the service head and in the meter base

Meter Base 281086 (Furnished by OG&E, installed by consumer.)

Service entrance conductors (furnished, installed by and connected by consumer.)

CONNECTION DIAGRAM

FOR SELF-CONTAINED THREE PHASE FOUR WIRE METER
208Y/120 OR 240Δ/120 VOLT 200-AMPERE MAXIMUM