


U773.6

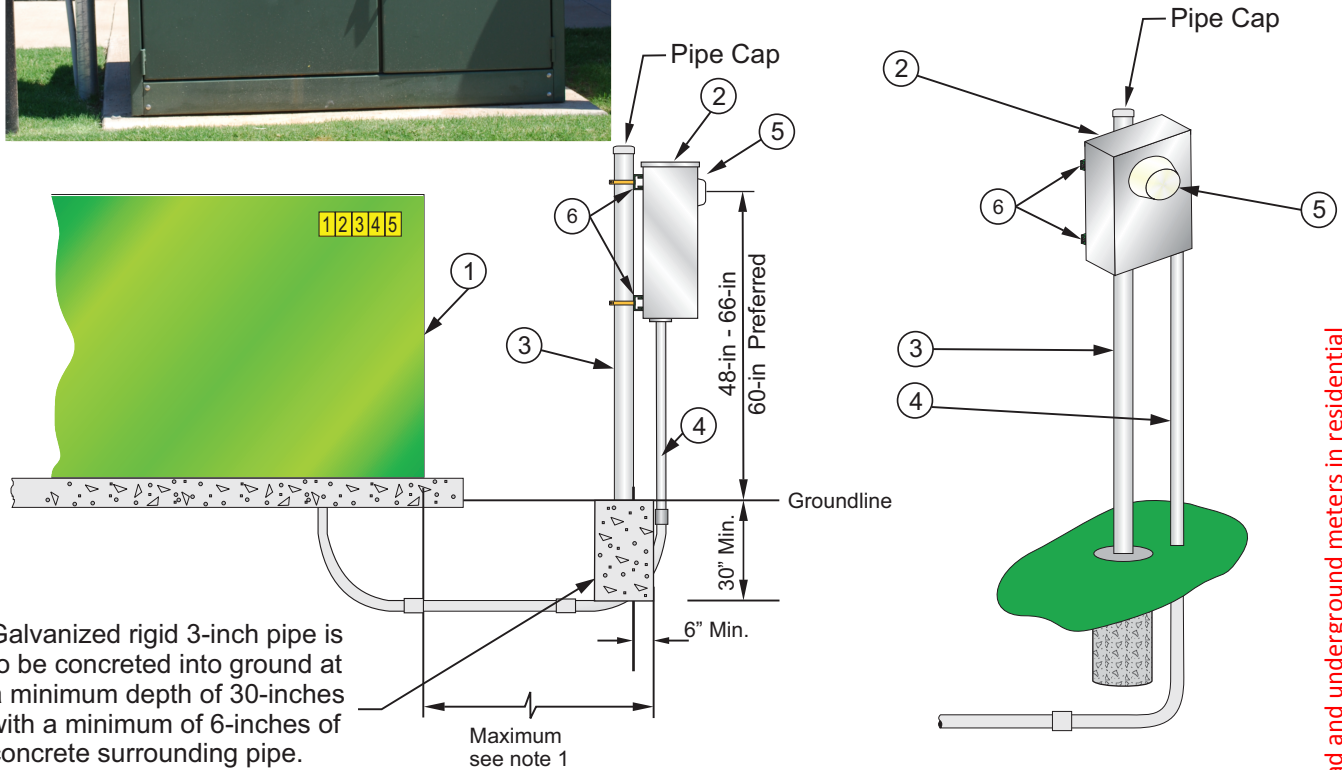

Galvanized rigid 3-inch pipe is to be concreted into ground at a minimum depth of 30-inches with a minimum of 6-inches of concrete surrounding pipe.

Maximum see note 1

ITEM Number	DESCRIPTION	FURNISHED BY		INSTALLED BY	
		O.G.&E.	CONSUMER	O.G.&E.	CONSUMER
1	Transformer	X		X	
2	CT Meter Base	X			X
3	3-inch Galvanized Rigid pipe set in concrete		X		X
4	Metering Conduit 1-inch sch 40 or rigid		X		X
5	Meter	X		X	
6	1 5/8-inch Kindorf and Clamps		X		X

Notes

1. Wiring from CTs to meter is not to exceed 20 feet in total length.
2. Place cap on top of pipe to keep moisture from inside of pipe to prevent deterioration.
3. Pipe to be galvanized rigid 3-inch pipe. Pipe to be set at a minimum depth of 30-inches with a minimum of 6-inches of concrete surrounding pipe.
3. In order for the meter to be accessible for operation and maintenance, a minimum of 4 feet clearance from all obstructions must be maintained in front of the meter.
4. Refer to U16 for proper identification and marking.

CT METERING COMPONENTS INSTALLATION INSTRUCTIONS ONE CUSTOMER AND CT'S IN TRANSFORMER **THREE-PHASE ONLY**

The following is a suggested configuration for meter bases for overhead and underground meters in residential and commercial applications. OG&E Energy Corp., its subsidiaries and affiliates disclaim any liability for the construction or maintenance practices relating to such suggested configuration.