


OKLAHOMA ONLY

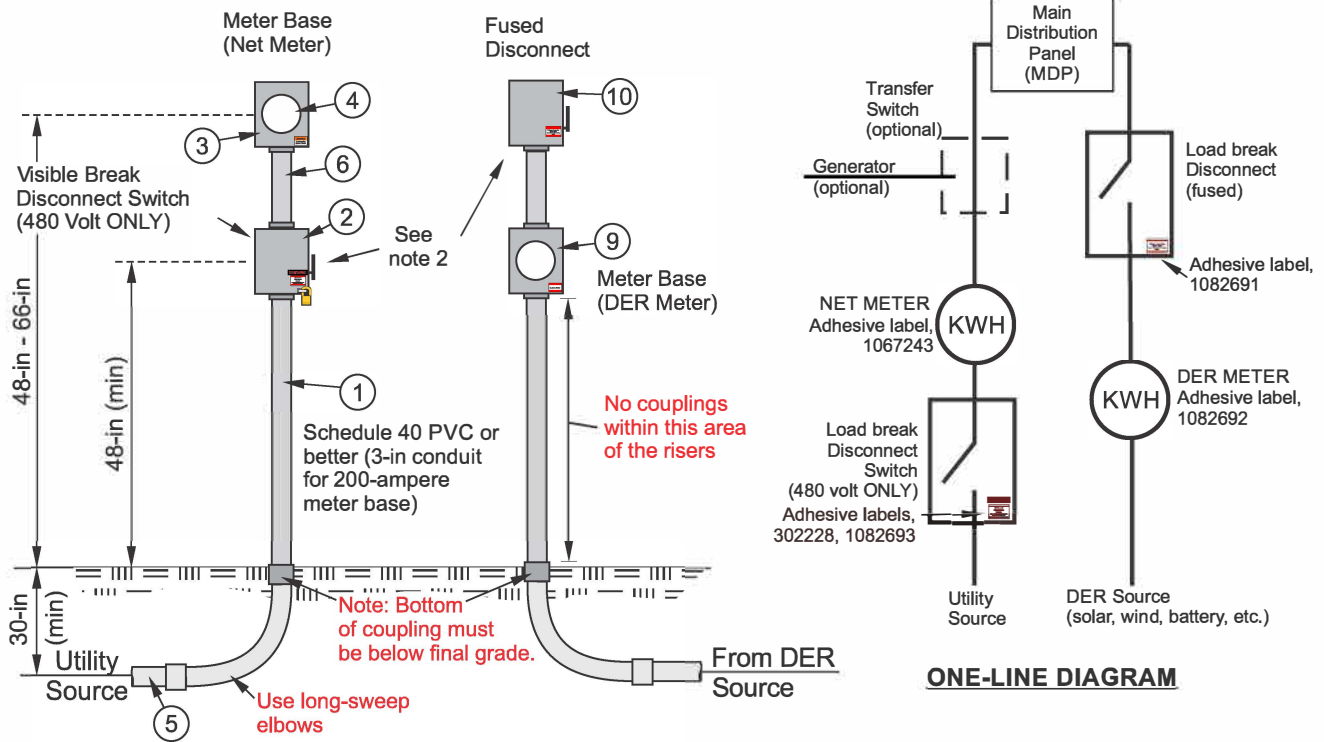

ITEM NO.	DESCRIPTION	FURNISHED BY		INSTALLED BY	
		OG&E	CONSUMER	OG&E	CONSUMER
1	Service Lateral Raceway		X		X
2	Load-Break Disconnect (480 Volt Only)		X		X
3	Meter Base	X			X
4	Self-Contained Meter, NET	X		X	
5	Service Lateral	X		X	
6	Service Raceway		X		X
*7	Service Equipment		X		X
*8	Grounding Electrode & Grounding Electrode Conductor		X		X
9	Self-Contained Meter, DER	X		X	
10	Fused Disconnect		X		X

* Not Shown

Notes:

1. Must comply with OG&E DER Interconnection Standards
2. OG&E to secure load-break disconnect box with series 1 lock (stk#301236).
3. OG&E equipment is to be installed on outside surface of structure and is not to be recessed.
4. Refer to U16 for proper identification and marking.
5. Refer to U760 & U760.1 for Metering Guidelines.
6. Testing and certification with completed application must be received.
7. Transfer switch to be set up not to allow generator to feed onto OG&E System.
8. OG&E equipment not to be used for customer grounding.

**DISTRIBUTED ENERGY RESOURCE (DER) METER INSTALLATION
FOR SELF-CONTAINED METERS
120/240 & 120/208 400-AMPERES MAXIMUM, 277/480-VOLTS 200-AMPERES MAXIMUM
DER CONNECTED THROUGH CUSTOMER MDP**

The following is a suggested configuration for meter bases for overhead and underground meters in residential and commercial applications. OGE Energy Corp., its subsidiaries and affiliates, disclaim any and all liability for the construction or maintenance practices relating to such suggested configuration. Each individual, company, or entity engaging the work associated with this configuration bears full responsibility for its, his, or her own occupational training, and compliance with all applicable local, state, and national laws and regulations. The configuration is not intended to replace the training, know-how, or instruction that may be needed for safe construction or maintenance.

APPROVED

SUPERSEDES AUG 2020 ISSUE